
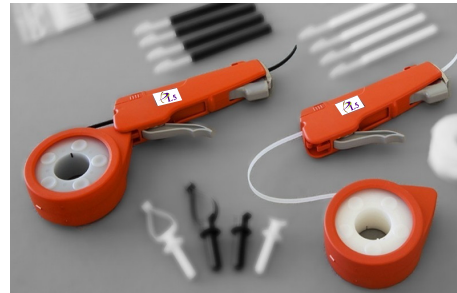







**CABLE TIE GUN**




Color	
Materials	ABS
Weight	0.3 lb / 0.136 kg
Conditioning	Unit
Custom Brand	Optional on demand
Warranty	1 year
<b>HS CODE : 3925.90.9995</b>	






**CABLE TIE GUN SPOOL**

Color			
Material	NYLON PA6.6 (POLYAMIDE) - AIR PLENUM RATED		
Lenght	50 Ft/ 15 m	50 Ft/ 15 m	50 Ft/ 15 m
Width	0,157" / 4.5 mm	0,157" / 4.5 mm	0,157" / 4.5 mm
Tensile Strength	55 lbs / 25 kg	55 lbs / 25 kg	55 lbs / 25 kg
Temperature resistance	-40° C / 80° F	-40° C / 80° F	-40° C / 80° F
UV-resistant	Yes	No	Yes
Weight	0,196 lb / 0.089 kg	0,196 lb / 0.089 kg	0,196 lb / 0.089 kg
Conditioning	Spool of 50 Ft / 15 m	Spool of 50 Ft / 15 m	Spool of 50 Ft / 15 m
<b>HS CODE : 3925.90.9995</b>			

**CABLE TIE GUN CLIP**

Color			
Material	POM (polyoxymethylene)	POM (polyoxymethylene)	POM (polyoxymethylene)
Tensile Strength	55 lbs / 25 kg	55 lbs / 25 kg	55 lbs / 25 kg
Temperature resistance	-40° C / 80° F	-40° C / 80° F	-40° C / 80° F
UV-resistant	Yes	Yes	Yes
Weight	0,148 lb / 0.067 kg	0,148 lb / 0.067 kg	0,148 lb / 0.067 kg
Conditioning	Bag of 200 clips	Bag of 200 clips	Bag of 200 clips
<b>HS CODE : 3925.90.9995</b>			

**CABLE TIE GUN PLUG**

Color			
Material	POM (polyoxymethylene)	POM (polyoxymethylene)	POM (polyoxymethylene)
Tensile Strength	62 Mps	62 Mps	62 Mps
Temperature resistance	-40° C / 80° F	-40° C / 80° F	-40° C / 80° F
UV-resistant	Yes	Yes	Yes
Weight	0,77 lb / 0.35 kg	0,77 lb / 0.35kg	0,77 lb / 0.35 kg
Conditioning	Bag of 100 plugs	Bag of 100 plugs	Bag of 100 plugs
<b>HS CODE : 3925.90.9995</b>			